




GCA-8

OFF-THE-ROAD

RUGGED
RELIABLE
RESILIENT

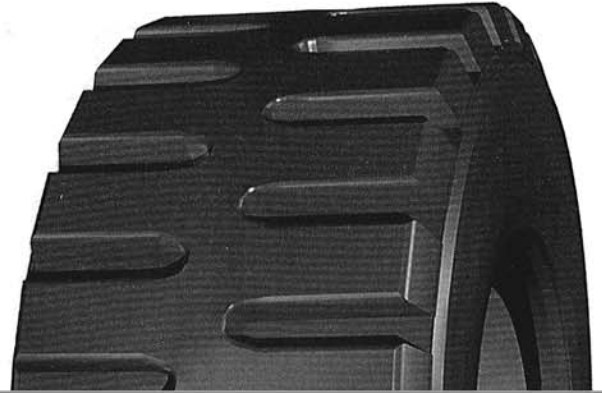

GCA-8

Size	Load rating	Tube	Code Indication	Approved rim	Tread Depth (mm)	Load Index		New tyre inflated dimensions (mm)		Max. Load (kg/LBS@various inflation pressure (kPa/PSI))	
						Single	Dual	Section Width	Overall Diameter	50km/h B	10km/h A2
26.5R25	*	TL	L-5	22.00/3.0	88		202A2	747	1839	900/19800@350/51 11500/25400@450/65	
	**						209A2				
29.5R25	*	TL	L-5	25.00/3.5	95		208A2	833	1972	10900/24000@350/51 14000/30900@450/65	
	**						216A2				
35/65R33	*	TL	L-5	28.00/3.5	95		217A2	987	2124	23000/50700@500/73 27250/60000@650/94	
	**						223A2				



- ☑ **Extra Deep Tread Pattern**
- ☑ **Specially Designed For Loaders & Dozers On**
- ☑ **Extremely Rocky Surfaces**
- ☑ **Super Cut Resistance**
- ☑ **Long Tread Life**
- ☑ **Exceptional Casing Durability**
- ☑ **Enhanced Stability & Riding Comfort**